

Crompton



POLARIS NIO-IV



SPAN NIO IV

Features



Long LED life



Uniform illumination



>100 lm/W
Luminaire Efficacy



<10% THD



4KV Surge Protection



High Power Factor

SURFACE LED TILE

Presenting new surface mounted LED Luminaire - available in 2ftx2ft (Polaris) as well as 1ftx4ft (Span) format. This highly reliable luminaire has high performance driver & best in class LED to provides for uniform illumination alongwith low maintenance. This luminaire is suitable for mounting on any surface & is highly recommended for any modern office - hospitality, IT/ITES & banks.

SURFACE LED TILE

Product Specification

- Housing and Frame - CRCA, white powder coated
- Diffuser - High translucent frosted
- Internal Wiring - PVC insulated copper wire
- Mains Terminal - 3 Way 10 Amps

Applications



Offices




Hospitals


Institutions,
ClassroomsHostels,
Schools
& CollegesSmall
OfficesCommunity
Centers,
ClubsSmall
Warehouses

Dimension Drawing

POLARIS NIO-IV

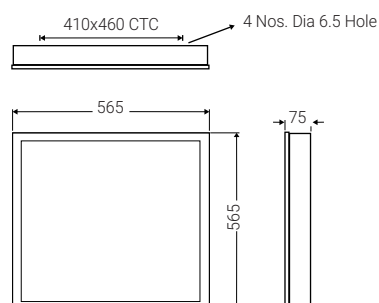

SPAN NIO IV

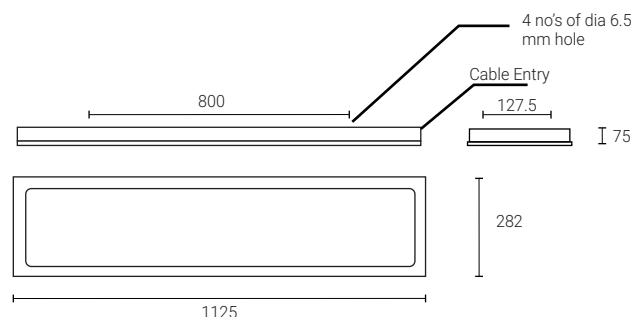

Technical Specification

Product Description	**Nominal Wattage	CCT (K)	CRI	VOLTAGE (V)	**MAINS CURRENT	*APPROX WT (A)
LCTLSNE-36-FO-CDL	36W	5700 ANSI	≥80	240	0.157	2.2
LCTLSNE-36-FO-TL	36W	4000 ANSI	≥80	240	0.157	2.2
LCTLSNE-36-FO-WW	36W	3000 ANSI	≥80	240	0.157	2.2
LCTLSNE-36-CDL(1X4)	36W	5700 ANSI	≥80	240	0.157	2.8
LCTLSNE-36-TL(1X4)	36W	4000 ANSI	≥80	240	0.157	2.8
LCTLSNE-36-WW(1X4)	36W	3000 ANSI	≥80	240	0.157	2.8